

Passive Glasses

Laser Cavity Materials


S7010N, S7005 and S7000

S7000 is a clear, cerium-doped silicate glass used as a laser cavity material. It is also available to serve as a UV cut-off material. S7005 is a laser cavity material with 5% doping of samarium oxide. This material is usually thicker than 6mm. S7010N is a laser cavity material with 10% doping of samarium oxide. This glass is recommended for most applications. SCHOTT offers a complete line of commercial filter glasses and can produce with a full range of doping levels for specific applications.

Property Sheet for S7005

Optical Properties	
n_d	1.562
v_d	55.0
n_{1054nm}	1.560
n_{1540m}	1.551
UV Cut-off at 10% Transmission, Thickness of 5mm [nm]	360±5
Absorption Coefficient at 1060nm [cm ⁻¹]	1.2±0.1
Optical Density at 1064nm [cm ⁻¹]	0.56±0.10

S-7005 Transmission Curve
Sample Thickness 5mm

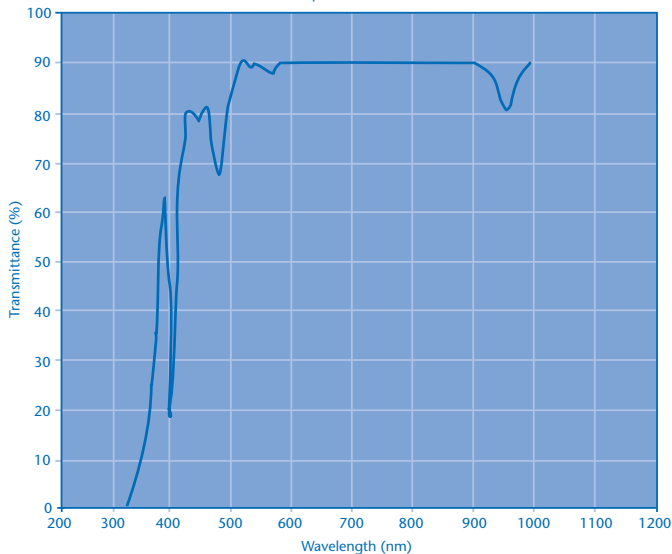

For more information please contact:

Advanced Optics
SCHOTT AG
 Hattenbergstrasse 10
 55122 Mainz
 Germany

Phone: +49 (0)6131/66-1812
 Fax: +49 (0)3641/2888-9047
 info.optics@schott.com
 www.schott.com/advanced_optics

Physical Properties	
Density, ρ [g/cm ³]	2.88
Thermal Conductivity (25°C), K [W/m•K]	0.77
Thermal Conductivity (90°C), K [W/m•K]	0.92
Young's Modulus, E [GPa]	78
Poisson's Ratio, ν	0.247
Thermal Expansion, $\alpha_{20-300^\circ C}$ [10 ⁻⁷ /°C]	115
Transformation Temperature, T_g [°C]	452
Softening Point (10 ^{7.6} poise) [°C]	594

Chemical Properties	
Weight Loss in 50°C Water [mg/(cm ² •day)]	0.180
Acid Resistance SR pH=0.3 at 25°C	1.2
Alkali Resistance AR pH=12 at 50°C	1.0
Staining Resistance FR pH=4.6 100h at 25°C	1
Climatic Resistance CR Water Vapor at 40-50°C for 30 h	1-2
Samarium Content [wt% Sm ₂ O ₃]	5

SCHOTT
 glass made of ideas