

FOTURAN® II

Photo-Sensitive Glass Wafer

FOTURAN® II is an improved photo-sensitive glass based on the well-known FOTURAN®. It is produced in a continuous melting process with optimal homogeneity.

FOTURAN® II is a technical, photo-sensitive glass that crystallizes after UV exposure and temperature processes. The crystallized areas can be etched with a high aspect ratio, resulting in extremely fine structures and vias. After a second exposure and tempering process, the glass can be transformed into a glass ceramic. Anodic bonding is possible, too.

Structured FOTURAN® II substrates can be applied in the semiconductor chip and semiconductor packaging processes. The process flow works without photo resist and can be used with standard semiconductor equipment.

Applications

- Interposer
- RF/MEMS, Sensor, Advanced Packaging
- Micro-Fluidics
- Micro-Optics
- Optical Waveguides/Interconnects

Standard supply forms

Supply form	Sizes*
Round (wafer)	6"
	8"
	12" (in preparation)
Square (substrate)	93 x 93 mm
	130 x 130 mm
	150 x 150 mm
	175 x 175 mm

* Standard thicknesses for each format: 0.5/0.7/1.0/1.3 mm.
Other formats and thicknesses available upon request.

Mechanical Properties

Density ρ in g/cm ³	2.37
Knoop hardness HK 0.1/20	480
Vickers hardness HV 0.2/25	520

Thermal Properties

Transformation temperature T _g in °C	455
Coefficient of mean linear thermal expansion α (20 °C; 300 °C) in 10 ⁻⁶ K ⁻¹ (Static measurement)	8.49
Thermal conductivity λ in W/(m*K)($\vartheta = 90$ °C)	1.28

Electrical Properties (Glass State)

Frequency	1 MHz	1 GHz	2 GHz	5 GHz
Dielectric constant (Permittivity) ϵ_r	6.8	6.4	6.4	6.3
Dissipation factor $\tan \delta$ (*10 ⁻⁴)	69	84	90	109

Chemical Properties

	Class		
Hydrolytic resistance acc. to DIN ISO 719	(μ g) Na ₂ O/g	578	HGB 4
Acid resistance acc. to DIN 12116	mg/dm ²	0.48	S 1
Alkali resistance acc. to DIN ISO 695	mg/dm ²	100	A 2



Optical Properties

Wavelength in nm	Refractive index (annealed at 40 °C/h)	
300.0	1.549	
486.1	1.518	n_f
546.1	1.515	n_e
587.6	1.512	n_d
656.3	1.510	n_c

FOTURAN® II

Photo-Sensitive Glass Wafer

Spectral Transmittance (Glass Thickness = 1.00 mm)

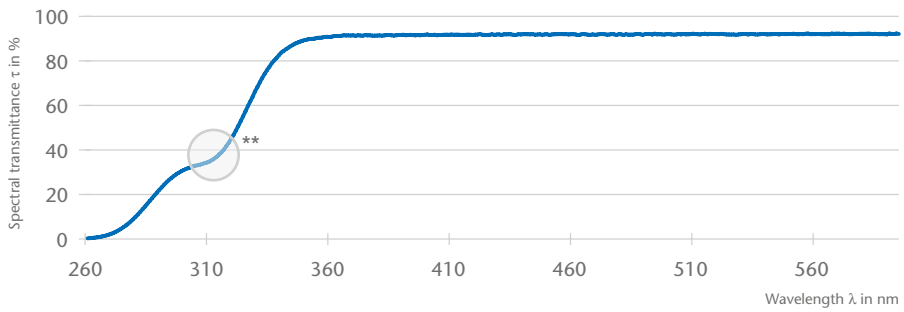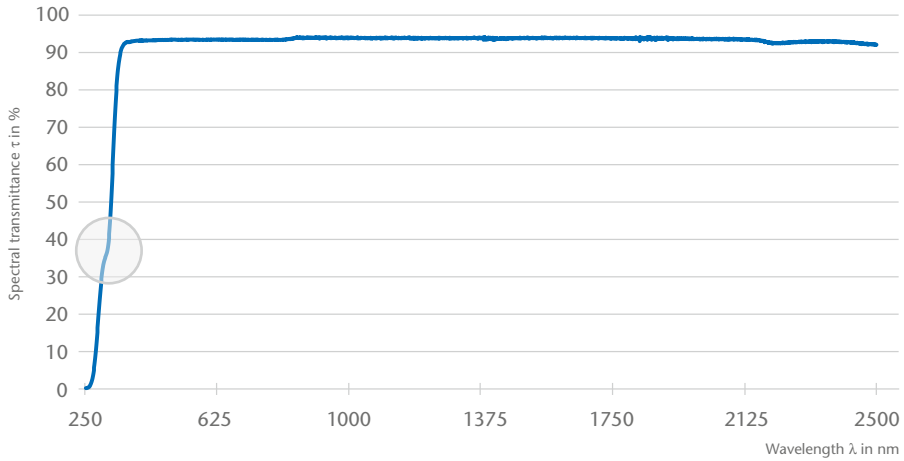

** Relevant range for exposure of FOTURAN® II

Version July 2016 | SCHOTT Advanced Optics reserves the right to make specification changes in this product flyer without notice.

Advanced Optics
SCHOTT AG
 Hattenbergstrasse 10
 55122 Mainz
 Germany
 Phone +49 (0)6131/66-1812
 Fax +49 (0)3641/2888-9047
 info.optics@schott.com

www.schott.com/advanced_optics

SCHOTT
 glass made of ideas