


## Outline Dimensions

(unit:mm)

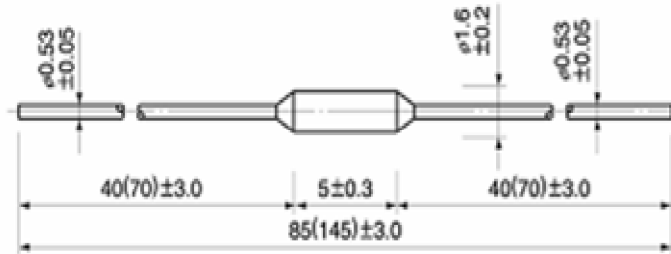

Note: Dimensions in ( ) are for long lead devices.

## Standard Ratings

### - AC Electrical Ratings -

WEEE (RoHS) Compliance 1)	Type Name 2)	Rated Functioning Temperature T <sub>f</sub> (°C)	Operating Temperature (°C)	T <sub>h</sub> (°C)	T <sub>m</sub> (°C)	Rated Current	Rated Voltage	PSE	UL	CSA	VDE	BEAB	CCC	KTl								
	SM095G0	100	95 <sup>+3</sup> <sub>-0</sub>	65	115	0.5A	250V (AC)	○ 3)	○ 3)	○ 3)	○ 3)	○ 3)	○ 3)	○ 3)								
*	SM110G0	115	110 ± 2	80	125																	
	SM126G0	131	126 ± 2	96	140																	
	SM130G0	135	130 ± 2	100	145																	
	SM134G0	139	134 <sup>+3</sup> <sub>-2</sub>	104	200										○ 3)	○ 3)	4)	○ 3)				
*	SM137G0	142	137 <sup>+3</sup> <sub>-2</sub>	107											○ 3)	○ 3)	○ 3)	○ 3)	○ 3)			
*	SM146G0	151	146 <sup>+3</sup> <sub>-2</sub>	116											○ 3)	○ 3)	○ 3)	○ 3)	○ 3)			

- Notes:** 1) \*: No use of hazardous substances prescribed by WEEE (RoHS).  
 2) The type is for standard lead. When long lead type is required, change the last number from "0" to "1".  
 3) O means "Approved". For details, please download the catalog.  
 4) SM134G0 has cUL recognition.

## - DC Electrical Ratings -

WEEE (RoHS) Compliance 1)	Type Name 2)	Rated Functioning Temperature T <sub>f</sub> (°C)	Operating Temperature (°C)	T <sub>h</sub> (°C)	T <sub>m</sub> (°C)	Rated Current	Rated Voltage	UL	VDE
	SM095G0	100	95 <sup>+5</sup> <sub>-0</sub>	65	115	3A	50V (DC)	○ 3)	○ 3)
*	SM110G0	115	110±2	80	125	5A			
	SM126G0	131	126±2	96	140				
	SM130G0	135	130±2	100	145				
	SM134G0	139	134 <sup>+3</sup> <sub>-2</sub>	104	200				
*	SM137G0	142	137 <sup>+3</sup> <sub>-2</sub>	107					
*	SM146G0	151	146 <sup>+3</sup> <sub>-2</sub>	116					

- Notes:** 1) \*: No use of hazardous substances prescribed by WEEE (RoHS).  
 2) The type is for standard lead. When long lead type is required, change the last number from "0" to "1".  
 3) O means "Approved". For details, please download the catalog.