


**45° Lightline**

## 45° Lightline

Engineered and designed to emit light at a 45° angle along the length of the line.

### Features

- The output fibers are angled 30° to the nosepiece, as a result they are polished on a bias, which causes emitted light to exit at 45° to the nosepiece. The line can be positioned off-axis to the object, illuminate the field-of-view without loss of uniformity, while avoiding interference with the camera; an important consideration in space constrained systems.
- Useful for illuminating a rectangular surface area where the features are perpendicular to the line body.
- Standard input ferrule fits ColdVision Series light sources. Can also be used with strobes.
- The lightline is calibrated to  $\pm 8$  gray scales at a mean of 200 with a gamma setting of 1.0, for optimum uniformity with DDL-lamp.
- Assembly method accurately positions the fiber line within the body on all three planes, to a tolerance of  $\pm .004$ ".(.102). The technique assures the fiber axis will be parallel with the mounting surface of the body.
- Rugged aluminum body with black anodized finish.
- PVC covered metal tubing protects the fiber bundle.
- Refer to section 25.02.01 for more information on uniformity of fiber optic products.
- Custom configurations can be engineered for unique requirements.
- The cylindrical and apertured lenses are adjustable and easy to attach.

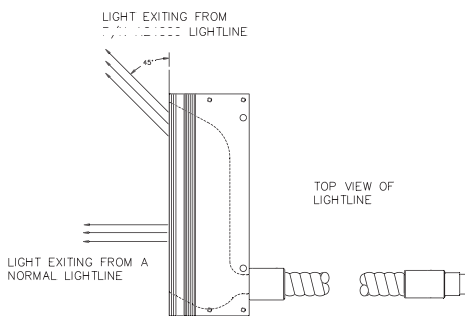

### 45° Lightline

Part No.	Line Dimensions	Input Active Fiber Dia.	Gray Scale Uniformity <sup>^</sup>	Part No. for Lens	
	Length x Width			Cylindrical	Apertured
Custom	6" x .039" (152 x 1.0)	.51" (13)	$\pm 8$	Custom	Custom

# 45° Lightline

Dimensions in ( ) are in mm


**Input:** Black Anodized Aluminum

**Body:** Black Anodized Aluminum

**Sheathing:** PVC Covered Metal Tubing

Product improvements may result in specification or feature changes without notice.

**Warning:** This product is manufactured with glass fiber. Not for use in cable/hose carrier. Call SCHOTT to discuss moving cable/hose carrier applications.

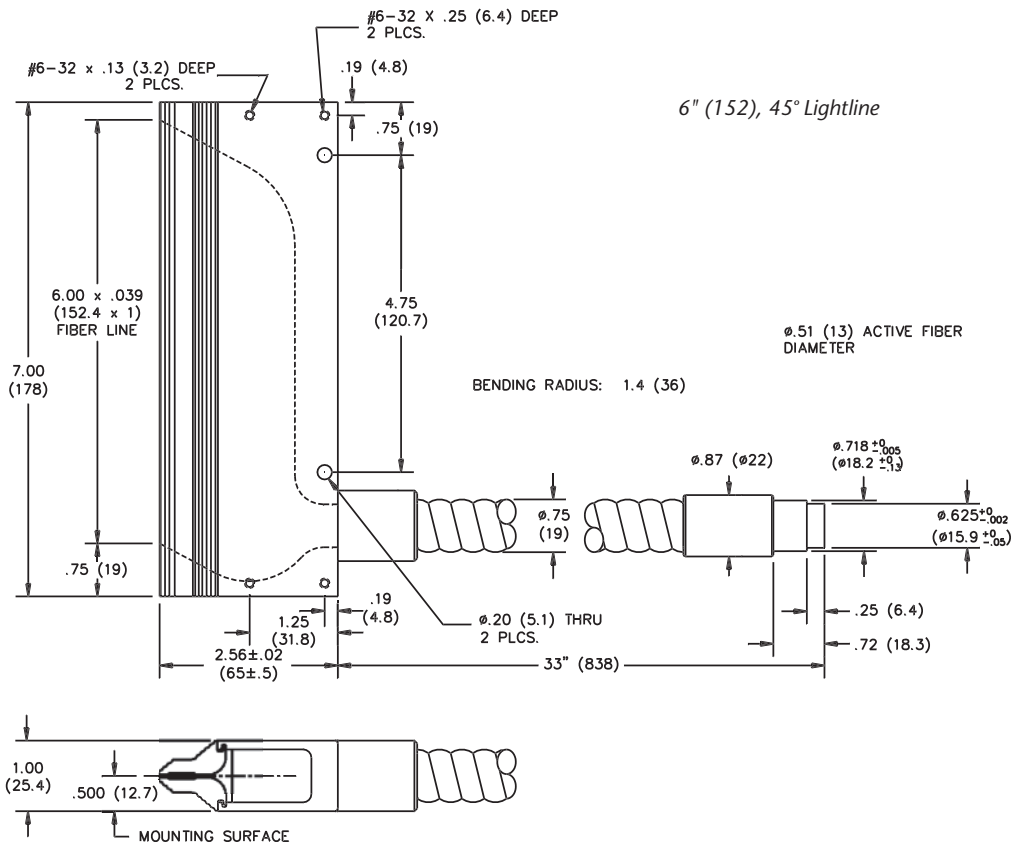

Lighting and Imaging

**SCHOTT AG**

Otto-Schott-Str. 2

55127 Mainz

Germany

Phone: +49 (0) 6131/66-7752

Fax: +49 (0) 6131/66-7850

E-mail: [lightingimaging@schott.com](mailto:lightingimaging@schott.com)

[www.schott.com/lightingimaging](http://www.schott.com/lightingimaging)

**SCHOTT**  
glass made of ideas