


Leached Image Bundles


Flexible Imaging Applications

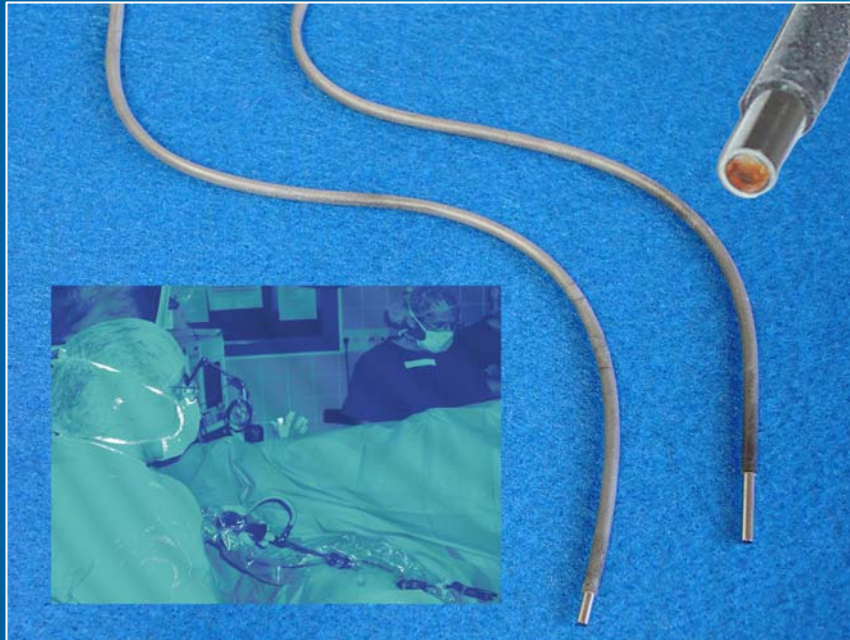

Leached Fiber Bundles For Flexible Imaging Applications

Performance Characteristics:

Leached fiber bundles are very flexible, coherent image guides. They are built by multiple draws of a high index core glass, with a lower index clad glass and an acid-soluble jacket glass. Leached Fiber Bundles are used primarily in endoscopes for medical or veterinary applications as well as in some industrial applications. Custom Leached Fiber Bundles are available on demand.

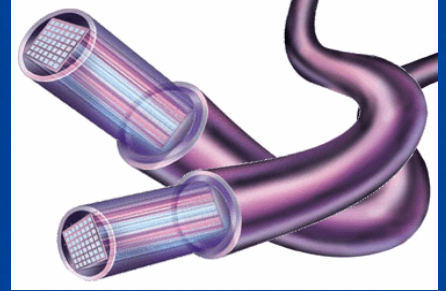

Typical Bundle Specifications:

OD Outer Diameter (mm)	Length (mm)	Quality Area Diameter (mm)	Pixel Size (μ)	Pixel Count (k)	Distal Ferrule Diameter (mm)	Proximal Ferrule Diameter (mm)
0.53	1000	0.43	7.5	4.5	0.65 x 4.50 available with or without	1.00 x 12.00
0.57	815 - 1000	0.45	8.0	4.5	0.76 -0.77 x 5.00 available with or without	1.05 x 15.00
0.67	965 - 1000	0.51	7.2	8.5	0.83 x 5.00 available with or without	1.05 x 15.00
1.00	670 - 1000	0.80	8.2	13.5	1.27 x 5.00 1.16 x 5.00	2.03 x 13.50 1.60 x 10.00
1.10	485 - 895	0.90	8.0	18	1.27 x 4.00	1.45 x 13.50 2.03 x 13.50
1.2	520	1.05	8.4	18	1.38 x 4.00	1.60 x 10.00
1.50	1350	1.30	10.6	18	1.84 x 6.5	1.98 x 15.00
1.65	1350	1.45	11.6	18	2.19 x 7.8	2.46 x 15.00

* SCHOTT continually upgrades its product and specifications; specifications are subject to change without notice

Fiber Optics
SCHOTT AG
 Otto-Schott-Strasse 2
 55127 Mainz
 Germany
 Phone: +49 (0) 6131/66-77 52
 Fax: +49 (0) 6131/66-78 50
fiberoptics.info@schott.com
www.schott.com/fiberoptics
 For your local sales contact please visit
www.schott.com/fiberoptics/english/contact

SCHOTT
 glass made of ideas