


Leached Image Bundles

Flexible Imaging Applications

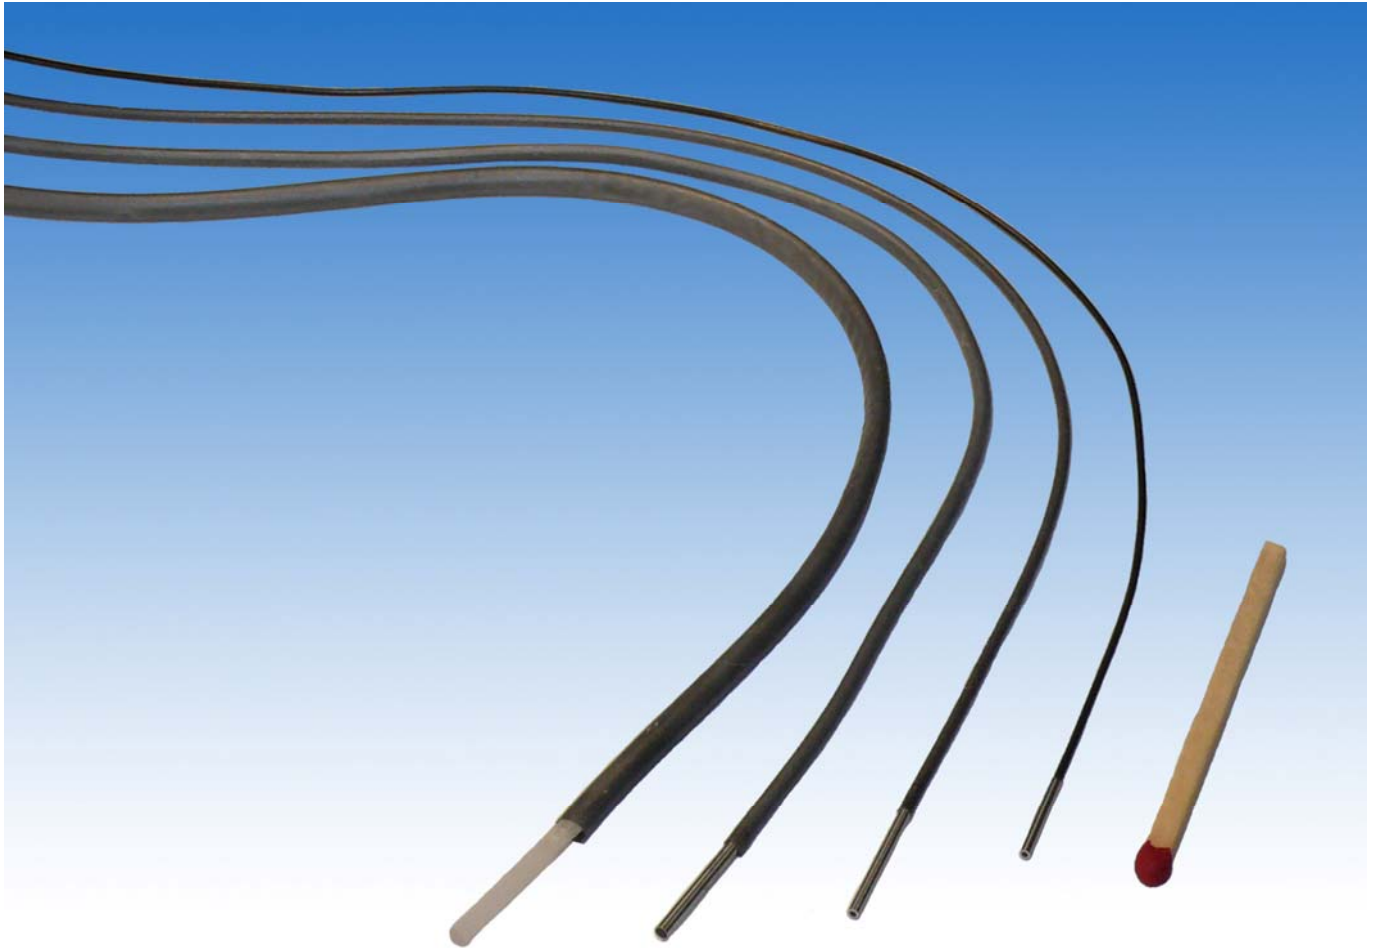


Performance Characteristics

Leached fiber bundles are very flexible, coherent image guides. They are built by multiple draws of a high index core glass, with a lower index clad glass and an acid-soluble jacket glass. Leached Fiber Bundles are used primarily in endoscopes for medical or veterinary applications as well as in some industrial applications. Custom Leached Fiber Bundles are available on demand.

Typical Bundle Specifications

OD Outer Diameter (mm)	Length (mm)	Quality Area Diameter (mm)	Pixel Size (μ)	Pixel Count (k)	Distal Ferrule Diameter (mm)	Proximal Ferrule Diameter (mm)
0.53	1000	0.43	7.5	4.5	0.65 x 4.50 available with or without	1.00 x 12.00
0.57	815 - 1000	0.45	8.0	4.5	0.76 -0.77 x 5.00 available with or without	1.05 x 15.00
0.67	965 – 1000	0.51	7.2	8.5	0.83 x 5.00 available with or without	1.05 x 15.00
1.00	670 – 1000	0.80	8.2	13.5	1.27 x 5.00 1.16 x 5.00	2.03 x 13.50 1.60 x 10.00
1.10	485 – 895	0.90	8.0	18	1.27 x 4.00	1.45 x 13.50 2.03 x 13.50
1.2	520	1.05	8.4	18	1.38 x 4.00	1.60 x 10.00
1.50	1350	1.30	10.6	18	1.84 x 6.5	1.98 x 15.00
1.65	1350	1.45	11.6	18	2.19 x 7.8	2.46 x 15.00

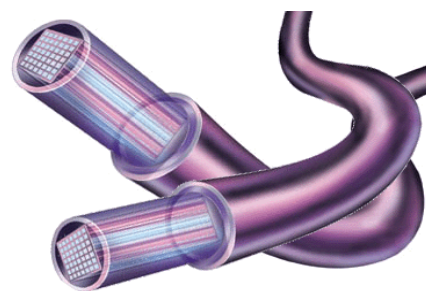

For more information please contact

Lighting and Imaging
SCHOTT AG
 Otto-Schott-Strasse 2
 55127 Mainz
 Germany

Phone: +49 (0) 6131/66-7894
 Fax: +49 (0) 6131/66-78 50
stephan.kuepper-brennberger@schott.com
www.schott.com/lightingimaging
 For your local sales contact please visit:
www.schott.com/lightingimaging/english/contact

All specifications are subject to change without prior notice. This datasheet or any extracts thereof may only be used in other publications with express permission of SCHOTT.

© SCHOTT AG

SCHOTT
 glass made of ideas