


Ultra-Thin Glass for Electronics Applications

SCHOTT is offering a portfolio of glass types in the thickness range of 25–210 µm

Product Information

SCHOTT ultra-thin glass is available in different glass types with different chemical and physical properties. It is produced with the untouched surface of our continuous down-draw process.

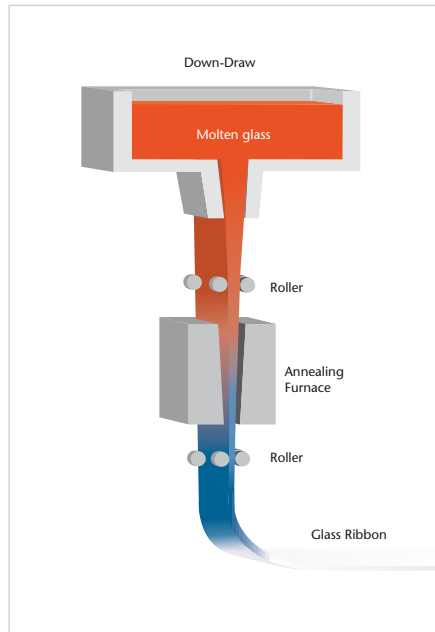

Supply Formats and Geometrical Tolerances


Thickness	25, 30, 50, 70, 100, 145, 175 and 210 µm
Sheet size	up to 500 x 500 mm ²
Wafer size	50, 100, 150, 200 and 300 mm Ø
Surface roughness Ra	< 1 nm
Total thickness variation	≤ 5 µm
Thickness tolerance	± 10 µm
Format tolerance	± 200 µm

Applications

- Semiconductor IC Packaging and 2.5D Interposer
- Electronic and Optical Sensors
- Energy Storage Devices
- Organic Electronics incl. Oxygen and Moisture Barrier
- High Strength, Scratch Resistant Touch & Cover Glass

Mechanical Properties	D 263® T eco	AF 32® eco
Density	2.51 g/cm ³	2.43 g/cm ³
Knoop hardness	470 @ 0.1/20	580 @ 0.1/20
Young's modulus	72.9 KN/mm ²	74.8 KN/mm ²

The CTE of AF 32® eco and D 263® T eco Over Temperature

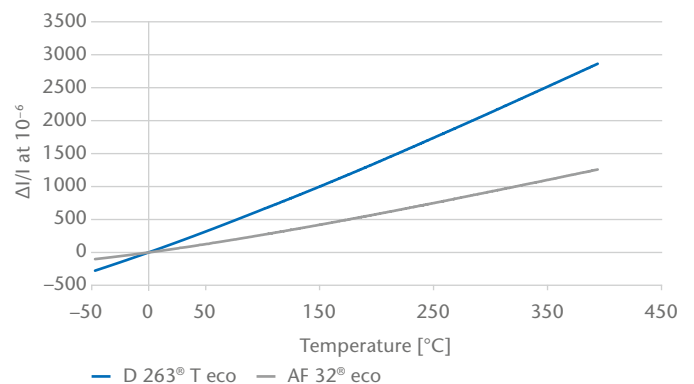


Thermal Properties	D 263® T eco	AF 32® eco
Tg	557°C	717°C
CTE (20°C – 300°C)	$7.2 \cdot 10^{-6} \cdot K^{-1}$	$3.2 \cdot 10^{-6} \cdot K^{-1}$
Thermal conductivity	1.06 W/mK @ 90 °C	1.16 W/mK @ 90°C

Electrical Properties	D 263® T eco	AF 32® eco
Dielectric constant ϵ_r	6.7 @ 1 MHz	5.1 @ 1 MHz
	6.4 @ 1 GHz	5.1 @ 1 GHz
	6.3 @ 5 GHz	5.1 @ 5 GHz
Dissipation factor $\tan \delta$	0.006 @ 1 MHz	0.003 @ 1 MHz
	0.007 @ 1 GHz	0.004 @ 1 GHz
	0.010 @ 5 GHz	0.005 @ 5 GHz


Chemical Properties	D 263® T eco	AF 32® eco
Glass type	Borosilicate	Alumino-borosilicate
Hydrolytic resistance	HGB 1	HGB 1
Acid resistance	S2	S4
Alkaline resistance	A2	A3
Alkaline free	no	yes

Examples of Competencies to Modify Ultra-Thin Glass Structuring by Laser or Powder Blasting to generate vias or microchannels

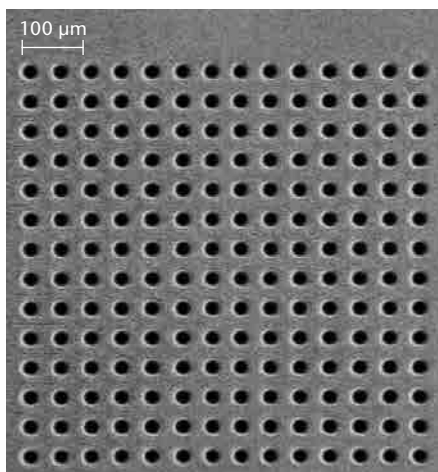


Example: laser structuring of SCHOTT AF 32® eco, 100 μm thickness, via diameter: 30 μm, pitch: 50 μm

Optical Properties AF 32® eco and D 263® T eco

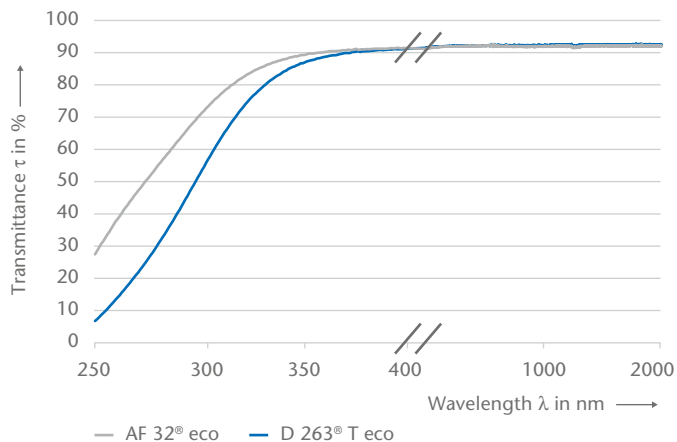


Chemical Strengthening

By chemical toughening the edge strength of D 263® T eco can be increased by a factor of 4

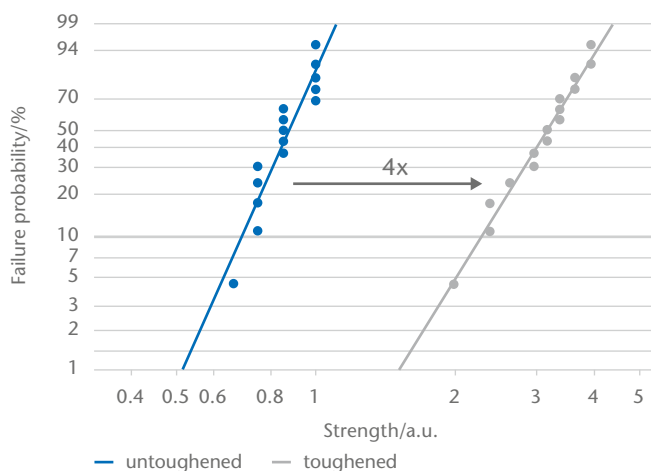

Gas Barrier Properties of Ultra-Thin Glass

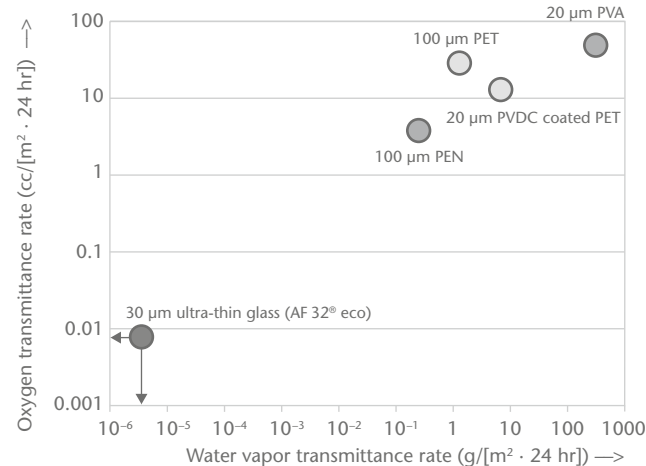

Version November 2015 | SCHOTT Advanced Optics reserves the right to make specification changes in this product flyer without notice.

Advanced Optics
SCHOTT AG
 Hattenbergstrasse 10
 55122 Mainz
 Germany
 Phone +49 (0)6131/66-1812
 Fax +49 (0)3641/2888-9047
 info.optics@schott.com

www.schott.com/advanced_optics

