

# Miniature Battery Fuse SEFUSE® D6SC Series (12A/15A)

Highly reliable secondary protection for battery packs in limited-space applications

## Product information


SCHOTT SEFUSE® D6SC series battery fuses are thin surface mount devices suitable for products that require space-saving li-ion battery components. The fuse will cut off in case of an instance of overcurrent, and its self-heater element is able to externally cut off in case of overcharging.

## Applications


- |  |  |
|--|--|
| <b>D6SCy-12 (12A)</b><br>Battery packs for   | <b>D6SCy-15 (15A)</b><br>Battery packs for   |
| <ul style="list-style-type: none"> <li>• Smartphones</li> <li>• Notebook PCs</li> <li>• Tablets</li> </ul> | <ul style="list-style-type: none"> <li>• Rechargeable power tools</li> <li>• Notebook PCs</li> <li>• Cordless vacuum cleaners</li> </ul> |

## Features of D6SC Series


- Thin design: only 0.85 mm
- RoHS compliant
- Antimony-free
- Halogen-free

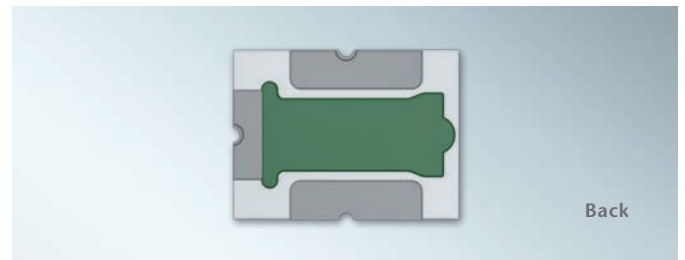

## Dimensions (Unit in mm)

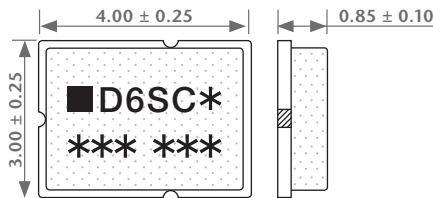

## Wiring Diagram

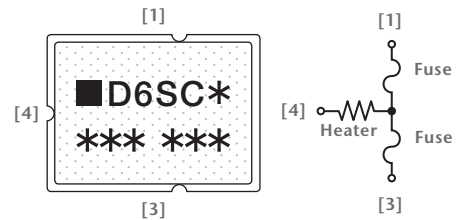

## Specifications

Name	Part Number	Rated Current (A)	Rated Voltage (Vdc)	Breaking Capacity (A)	Fuse Resistance (mΩ)	Applicable Series Cell Number	Applicable Voltage Range (V)	Heater Resistance (Ω)	UL	TÜV
D6SC Series	D6SC1-12	12	36	50	2.00 ± 1.00	1	3.0 ~ 5.0	1.35 ± 25%	E357922	J50247451
	D6SC2-12					2	4.0 ~ 9.0	2.50 ± 20%		
	D6SC3-12					3	7.4 ~ 13.8	8.30 ± 20%		
	D6SC4-12					4	10.5 ~ 19.6	16.70 ± 20%		
	D6SC1-15	15			1.50 ± 1.00	1	3.0 ~ 5.0	1.25 ± 20%		
	D6SC2-15					2	5.0 ~ 9.0	3.20 ± 20%		
	D6SC3-15					3	7.4 ~ 13.8	6.95 ± 20%		
	D6SC4-15					4	10.5 ~ 19.6	13.10 ± 20%		
	D6SC5-15					5	14.4 ~ 23.5	23.50 ± 20%		
	D6SC6-15					6	16.8 ~ 28.0	36.20 ± 20%		

SCHOTT Japan Corporation  
3-1 Nichiden, Minakuchi-cho,  
Koka-shi, Shiga 528-0034  
Japan  
Phone: +81 (0) 748-63-6629  
Fax: +81 (0) 748-63-6627  
tf.sjc@schott.com

www.schott.com/batteryfuse



70305 ENGLISH 03/2019 all/nino Printed in Germany