

SCHOTT® Fiber Optic Light Cables (LKS)

For museum and retail showcases, saunas and spas



SCHOTT® Fiber Optic Light Cables (LKS) provide an efficient and flexible method of transporting light from an external LED light source to a display area, while providing effective, durable and long-lasting performance. Up to several hundred light dots can be combined to create a myriad of lighting patterns in sauna ceilings or elaborate display showcases.

Features:

- Thin and flexible.
- Able to withstand high temperatures and high levels of humidity in demanding environments such as saunas.

Advantages:

- Optimum safety of illuminated objects as glass fibers transmit light but no electricity.
- Zero heat transference means showcase temperatures are kept at a consistent level.
- Illuminate displays without harmful UV or IR radiation.
- Suitable for installation in tight spaces and corners within showcases, shelves and walls.

Technical Specifications

Size	Part No.	Fiber bundle diameter [mm (in)]	Outer (cable) diameter [mm (in)]	Minimum bending radius [mm (in)]	End ferrule options (see page 2)	Sheathing	Operation temperature [°C (°F)]
¾	561300173	1.0 (0.039)	2.2 ± 0.10 (0.087 ± 0.004)	5 (0.197)	B1	HFFR compounds (halogen-free and flame-retardant: fire class Eca); Hardness: Shore 45D (acc. to DIN 53505); color: black (similar to RAL 9011) Compliant with European directive 2011/65/EU including 2015/863/EU REACH compliant	Common end face, glued: 0...+200 (+32...+392) Flex sheathing -20...+70 (+4...+158)
1.3	1500116	1.3 (0.051)	2.2 ± 0.10 (0.087 ± 0.004)	8 (0.315)	B1		
1.5	561330024	1.4 (0.055)	2.7 ± 0.10 (0.106 ± 0.004)	8 (0.315)	B1.5		
3	561360154	2.0 (0.079)	3.85 ± 0.15 (0.152 ± 0.006)	15 (0.591)	B2, F2		
6	1500118	2.6 (0.102)	4.2 ± 0.15 (0.165 ± 0.006)	15 (0.591)	-		
8	561370139	3.0 (0.118)	4.85 ± 0.15 (0.191 ± 0.006)	20 (0.787)	B3, F3, G3, SG3		
9	1500119	3.3 (0.130)	4.65 ± 0.15 (0.183 ± 0.006)	20 (0.787)	-		
14	561380086	4.0 (0.157)	6.35 ± 0.15 (0.250 ± 0.006)	25 (0.984)	B4, F4, G4		
18	1127105	4.5 (0.177)	7.4 ± 0.15 (0.291 ± 0.006)	40 (1.575)	B4, F4.5, G4.5		
24	561380078	5.8 (0.228)	8.7 ± 0.3 (0.343 ± 0.012)	50 (1.969)	F6		
26	1500120	6.0 (0.236)	9.7 ± 0.3 (0.382 ± 0.012)	50 (1.969)	-		
36	561380131	7.3 (0.287)	10.1 ± 0.3 (0.398 ± 0.012)	60 (2.362)	F7.3		



SCHOTT® Fiber Optic Light Cables (LKS)


For museum and retail showcases, saunas and spas

Standard ferrules


Brass ferrules
(for crimped cable ends)

Nickel silver ferrules
(for stripped cable ends)


End ferrules – decorative applications

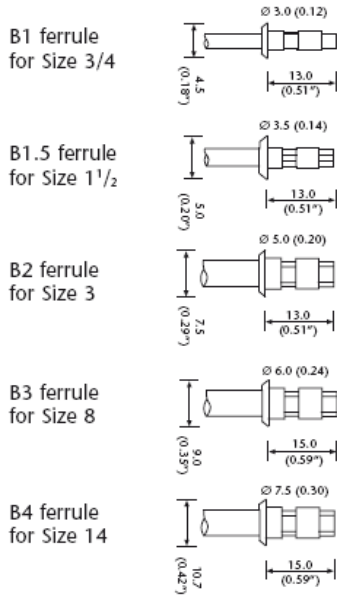


End ferrules – lighting applications

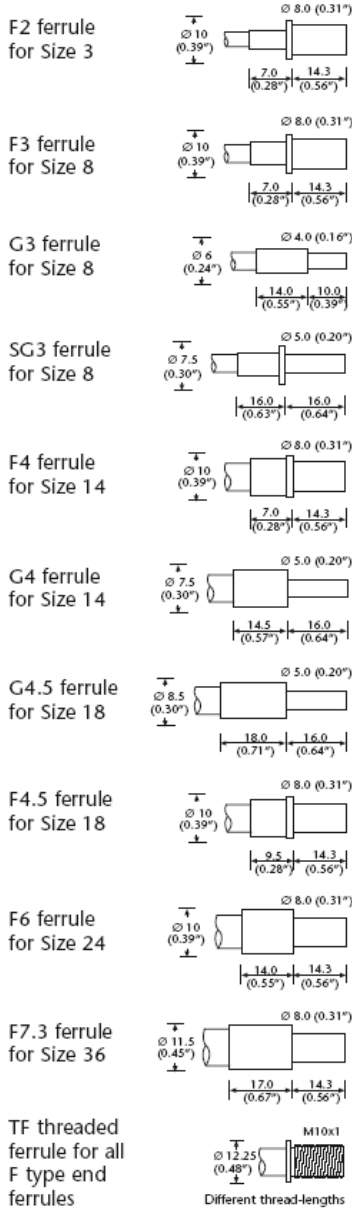

The transmission of light versus tail length

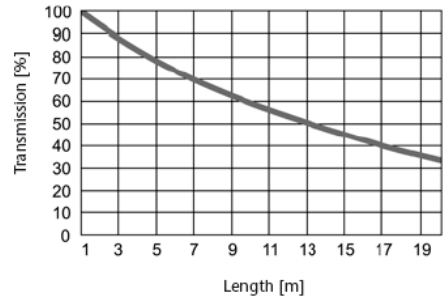

Absorption of light, per meter of fiber, versus wavelength

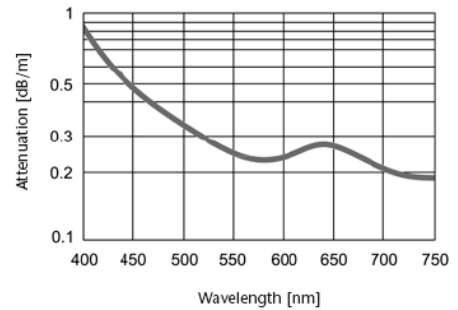

All specifications are subject to change without prior notice. This datasheet or any extracts thereof may only be used in other publications with express permission of SCHOTT. © SCHOTT AG.

Lighting & Imaging
SCHOTT AG
 Hattenbergstrasse 10
 55122 Mainz
 Germany
 Phone: +49 (0)6131/66-7760
 Fax: +49 (0)6131/66-7850
lightingimaging@schott.com
www.schott.com/lightingimaging

