



# SCHOTT® Micro-Display and Sensor Bonding

Components and Sub-Assemblies for Imaging Applications

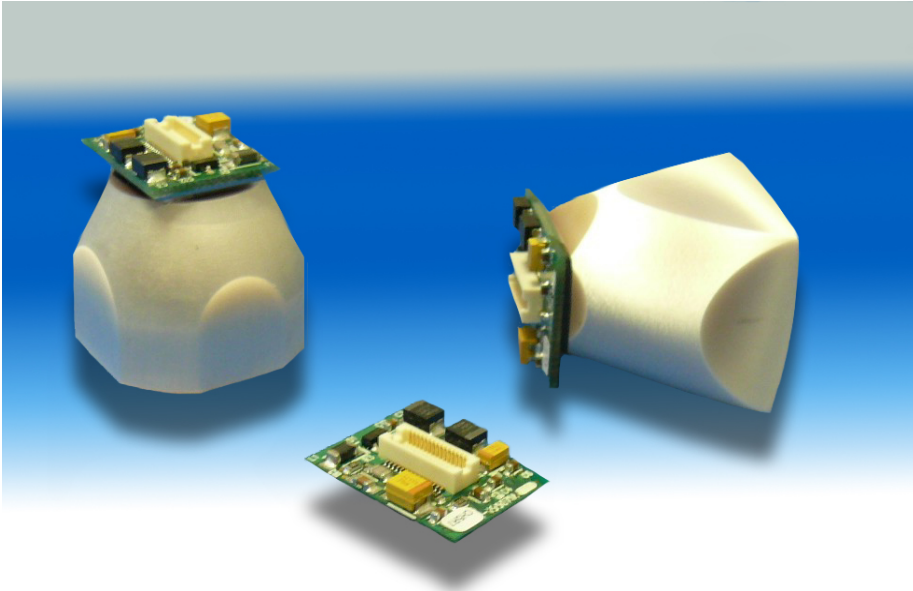


Micro-OLED courtesy of eMagin Corp. with Fiber Optic taper

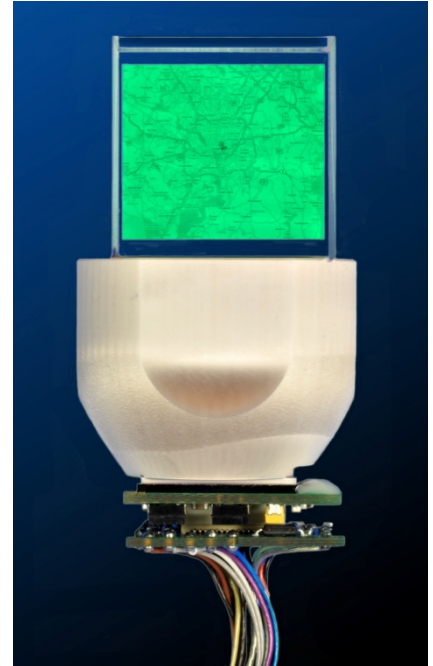


Micro-OLED with Fiber Optic taper - beam splitter subassembly with 2x magnification

## Performance Characteristics

- Optical bonding of Fiber Optic faceplates or tapers to Micro-OLED displays
- Provides design flexibility in order to magnify images in optical systems for near-eye or direct view applications
- Fiber Optic element size is comparable to OLED pixel size to maintain high-resolution imagery
- Images are brought to the top surface through the zero-depth window characteristics
- Customized sizes, formats and magnification ratios (typical magnification range may be up to a factor of 3)
- Glass materials provide inert and durable surface properties for compatibility with optical coatings and bonding materials
- Tapers and faceplates can be finished with convex or concave output surfaces for coupling into custom lens assemblies.
- Available in green or in color.

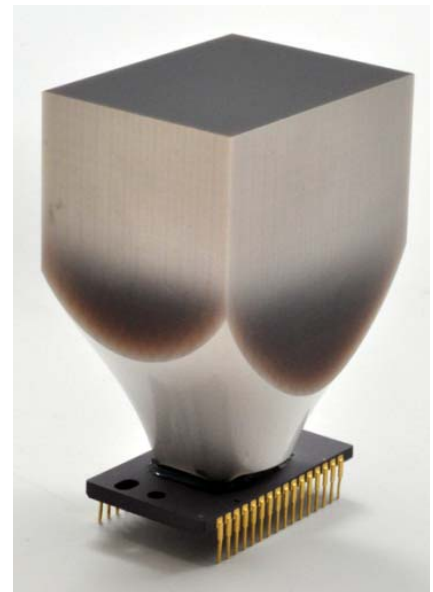

SCHOTT offers optical bonding of Fiber Optic faceplates and tapers to CCD or CMOS chips. Please contact us for more information.

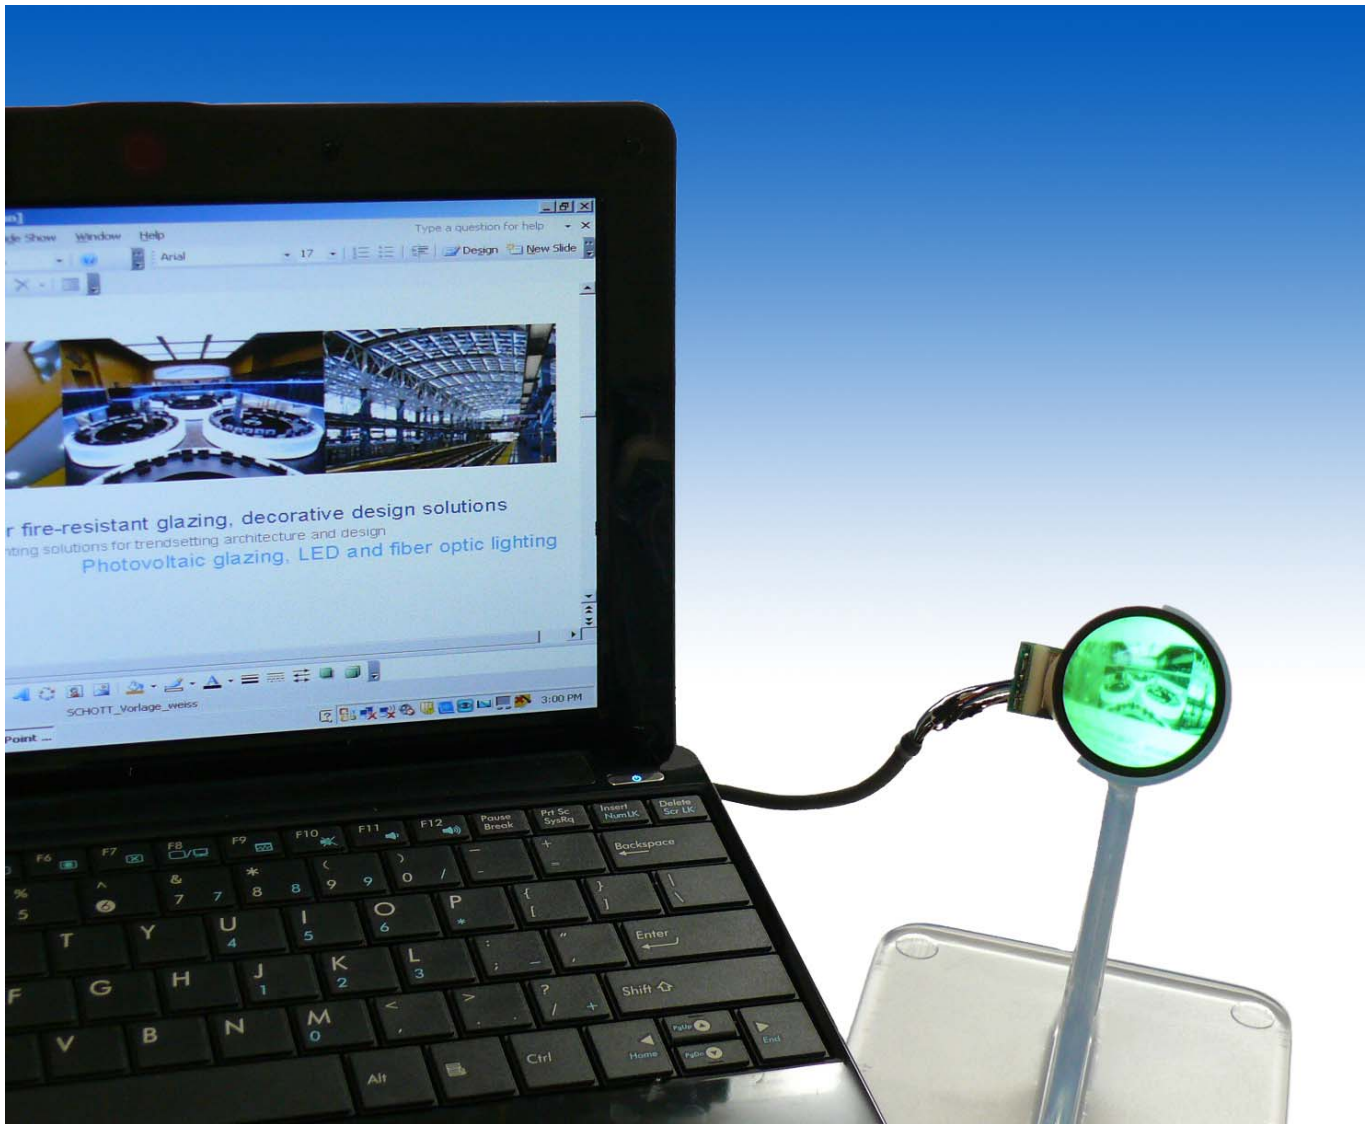

### Sample Applications

- MRI – Medical
- HUD – Field Technicians
- HUD – Surgeons
- Surgical Simulations



All specifications are subject to change without prior notice.  
This datasheet or any extracts thereof may only be used in other publications with express permission of SCHOTT.  
© SCHOTT AG

Lighting and Imaging  
**SCHOTT AG**  
Hattenbergstrasse 10  
55122 Mainz  
Germany  
Phone: +49 (0) 6131/66 7833  
Fax: +49 (0) 6131/66 7850  
lightingimaging@schott.com  
www.schott.com/lightingimaging

**SCHOTT**  
glass made of ideas